

Sylvania KENSINGTON MK2



SYLVANIA


The Sylvania KENSINGTON MK2 combines tradition with modern architecture and the latest in LED light source technology to provide a classic gas lantern replica from the early days of road lighting.

The luminaire is cast from aluminium and incorporates acrylic refractor panels. Compliance is to AS1158 Category P Minor Road Lighting standards and AS1158.6 where applicable; the KENSINGTON MK2 is therefore suitable for Roadway P Category applications as well as car park and amenity illumination.

The standard colour finish is satin black powder coat with special colours available to order. The control gear is integral and housed in the top section of the luminaire.

IP 66

IK 07



URBAN &
RESIDENTIAL
STREETS



BIKE &
PEDESTRIAN
PATHS



LARGE
AREAS



RAILWAY
STATIONS &
METROS

MAIN APPLICATIONS


- Urban and residential streets
- Bike and pedestrian paths
- Large areas
- Railway stations and metros

KEY ADVANTAGES

- 16W, 30W system wattage
- Integral control gear
- Smart City ready
- IP66 sealed optical and gear chamber
- Spill light shields available
- IK07
- CRI>70
- Ambient temperature 40°C
- 20 year design life
- Available in Colour Temperature of 4000K, 3000K
- Limited Warranty: 5 years
- Polyester powdercoat finish, various colour available



KENSINGTON MK2 when fitted with Heritage bars provides a classic lantern look from early road lighting periods

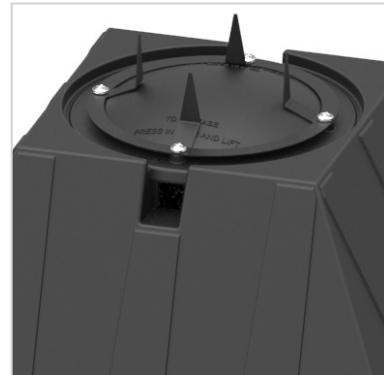

Bird spike accessory available to birdproof the KENSINGTON MK2



Spill light control shield for sensitive areas and environmental concerns

SCS is focused on Smart Control technologies, delivering solutions to clients that enable these Smart LED luminaires to become smarter.

The equipped NEMA sockets on the luminaire connects a Smart Light Point Controller/ Node with an easy twist and lock mechanism. The Light Point Controllers enables these luminaires to be connected to a dedicated network and a User-Interface on a computer, which allows these luminaires to be remotely managed.

Key benefits:



Constant Light Output (CLO)

Additional energy savings (over 20%) by using the Constant Light Output (CLO) and Virtual Light Output (VLO) functionality



Dimming schedules

Reducing the amount of light when not required, thereby reducing light glow as well as get further energy savings



Pro-active maintenance

The system reports errors and failures as they occur, helping to repair/ restore the luminaires pro-actively



Smart City devices

Connect additional Smart City devices including Air-quality monitors, Noise sensors, Motion sensors etc



by Sylvania Schréder


For more information on smart controls contact: info@scs-schreder.com

GENERAL INFORMATION		ELECTRICAL INFORMATION	
Recommended installation height	4m - 6m	Electrical class	Class I / Class II
Driver included	Yes	Nominal voltage	230V - 50Hz
RCM Mark	Yes	System watts	16W, 30W
ROHS compliant	Yes	Power factor (at full load)	> 0.9
Testing standard	EMC compliant: AS/NZS CISPR15 Luminaires Performance: AS/NZS 60598.1 & AS/NZS 60598.2.3 Lighting for Roads and Public Spaces: SA/SNZ TS 1158.6	Surge protection options (kV)	10kV
HOUSING AND FINISH		Electromagnetic compatibility (EMC)	AS/NZS CISPR15
Housing	Die-cast aluminium body	Control protocol(s)	DALI / 1-10V
Protector	Injection moulded Acrylic	Socket(s)	NEMA 7 pin
Housing finish	Polyester powdercoated finish	Sensor(s)	Devices & sensors for smart city applications
Standard colour(s)	Satin Black Any other colour on request	OPTICAL INFORMATION	
Tightness level	IP66	LED colour temperature	4000K/ 3000K
Impact resistance	IK07	Colour rendering index (CRI)	≥ 70
PERFORMANCE		Upward Light Output Ratio (ULOR)	<1%
Lumen efficacy	Up to 108 lm/W	Lumen Maintenance	≥ L90 @ 88000 hours
OPERATING CONDITIONS			
Temperature range from operation (Ta)		-10°C to +40°C	


DIMENSIONS AND MOUNTING

W x H x D (mm)	440 x 662.4 x 440
Weight (kg)	13
Mounting possibilities	76mm post top

KENSINGTON MK2

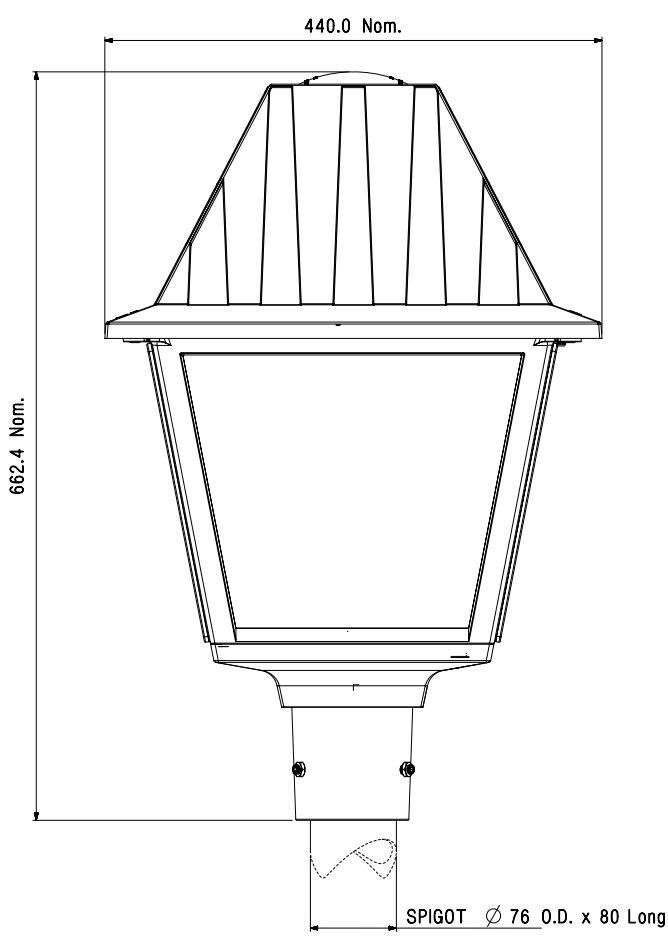

KENSINGTON MK2 complete with Heritage bars

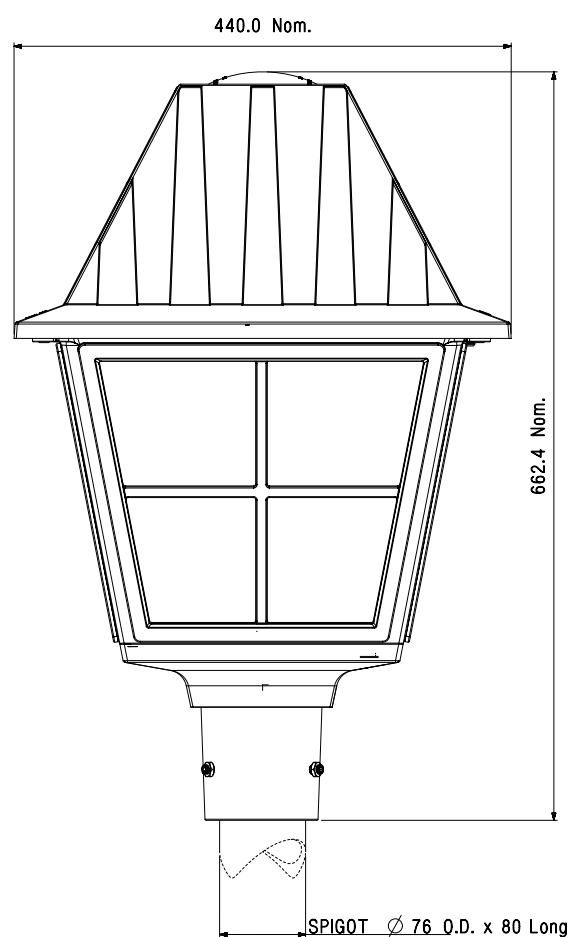



KENSINGTON MK2

Product Code	Description	Beam Dist.	System Power (W)
KX47Z0001L16	KENSINGTON MK2 16W, 4000K, NEMA Base, Shorting Cap, Satin Black, 5m Cable	Type 3	16
KX47Z0001L30	KENSINGTON MK2 30W, 4000K, NEMA Base, Shorting Cap, Satin Black, 5m Cable	Type 3	30

SPECIFICATIONS:

STANDARD CONFIGURATION:

- LED Colour Temperature 4000K
- Electrical Class I
- Control Complete with 3-core TPS 450/750 2.5mm² flexible cable, 5 meters long
- Control Dimming / 1-10V
- Control NEMA 7 PIN
- Colour NEMA Shorting Cap
- Colour Satin Black

OPTIONS:

- LED Colour Temperature 3000K
- Electrical Class II
- Control Dimming/ DALI
- Control NEMA Photocell
- Colour Any RAL colour on request

ACCESSORIES

KX00001	SPILL LIGHT CONTROL SHIELD
KX00002	BIRD SPIKE
KX00003	HERITAGE BARS

KENSINGTON MK2 16W

