
Schréder

Experts in lightability™

SOLIS SAMPSON



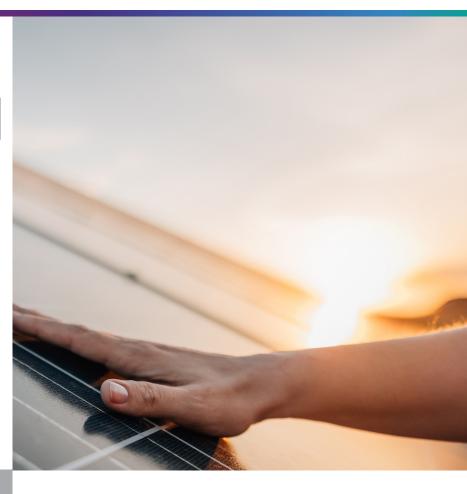

KEY ADVANTAGES

- > Stylish Design: Features a sleek vertical mounting option for a modern aesthetic.
- Versatile Optics: Offers four optical options suitable for general area, pathway, and cycleway lighting.
- > Flexible Mounting Heights: Ideal for installations at heights ranging from 4 to 6 meters.
- > Color Temperature Choices: Available in both 3000K and 4000K, catering to different lighting preferences.
- > Durable Construction:
 Made from marine-grade
 aluminum, ensuring longlasting performance in various
 environments.
- Broad Applicability:Suitable for pedestrian and bike paths, off-grid areas, urban, and residential settings.

The Sampson is a post top solar luminaire with a stylish vertical mounting option. The Sampson is available in four optics suitable for general area lighting and pathway or cycleway lighting. Typical mounting heights are 4 to 6 meters and available in 3000k & 4000K colour temperatures and marine grade aluminium the sampson is suitable for a myriad of lighting locations.

Applications: Pedestrian & Bike Paths, Off Grid, Urban & Residential

Solar lighting offers significant savings compared to grid lighting.



Energy savings

With solar lighting, there are no electricity costs because the luminaires are powered by renewable energy from the sun. This means that businesses and communities can save money on their electricity bills, which can add up to significant savings over time.



Installation savings

Solar lighting can be installed quickly and easily without the need for electrical infrastructure. This means that installation costs are much lower than grid-connected lighting, especially in remote areas or areas with difficult terrain.



Solar LED lighting requires minimal maintenance. With no reliance on power transmission or distribution infrastructure, there are fewer components to wear out or require maintenance. There is no need to schedule specific maintenance for the solar kit as the solar panels are self-cleaning. This means that maintenance costs are much lower than with grid lighting.



Environmental savings

Solar lighting is an environmentally friendly, cost-effective alternative to grid lighting, with no greenhouse gas emissions. It offers significant savings on electricity, installation, maintenance, and environmental impact, helping businesses and communities reduce costs and their environmental footprint.

Schréder



GENERAL INFORMATION

Mounting height	3.5-6m
Testing standard	AS/NZS 60598.1:2017
Warranty	Battery-5 yrs, Solar array 25 yrs performance warranty Overall 5 yrs.

HOUSING AND FINISH

Housing	Marine Grade Aluminium
Colour	RAL 9017 Black
Tightness level	IP65
Impact resistance	IK 08

OPTICAL INFORMATION

LED colour temperature	3000K/4000K
Colour rendering index (CRI)	80

PERFORMANCE

Lumen output	1800lm
Lumen efficacy	150lms/w

ELECTRICAL INFORMATION

System Voltage	18V DC
System wattage	12W
Battery	LiFeP04
Autonomy	2 Days
Peak Rated Wattage	18W

OPERATING CONDITIONS

Operation	Programmable Dimming profiles
Temperature range from operation (Ta)	-20°C to + 60°C

DIMENSIONS

Weight (kg)	8kg
LxWxH(mm)	475 x 475 x 600
Mounting possibilities	Spigot mount 60 & 76mm OD

ORDER CODES

PRODUCT CODE	NAME	WATTAGE	OPTIC	ССТ
SS12W830XT170N	SAMPSON	12	T1	3000K
SS12W830XT270N	SAMPSON	12	T2	3000K
SS12W830XT470N	SAMPSON	12	T4	3000K
SS12W840XT170N	SAMPSON	12	T1	4000K
SS12W840XT270N	SAMPSON	12	T2	4000K
SS12W840XT470N	SAMPSON	12	T4	4000K